



Formulated For The Professionals

VT-242 Non Skinning Mastic Sealant

Non-drying Mastic Sealant

A one component, paste like non-drying non oxidizing mastic sealant that is highly durable yet pliable. It is resistant to the extremes of heat, cold, moisture, weathering, vibration, and movement without breakdown or leakage. When used to seal between rubber gaskets and glass, it exhibits minimal swell and bleed.

Applications:

For Automotive/ Industrial: Ideal for sealing between glass and rubber in car windscreen. Also widely used as a spot weld sealant. It has excellent compatibility on EPDM rubber, glass, automotive paint systems, PVC and ABS plastic.

For Construction: This is excellent sealant for sealing joints in sheet metal. It is ideal for sealing standing seam roofs, side walls, gutters and downspouts. It's for filling and caulking joints in heating and air conditioning ducts. Then, it's also compatible with and suitable for use on polyurethane foam and extruded polystyrene.

Available colour: Black


Item Code	Content	Carton Quantity
VT-242	300 ml Cartridge	24 / Carton

Features

- Good weathering resistance
- Excellent adhesion
- Easy to use



WINDSCREEN
(RUBBER/METAL)

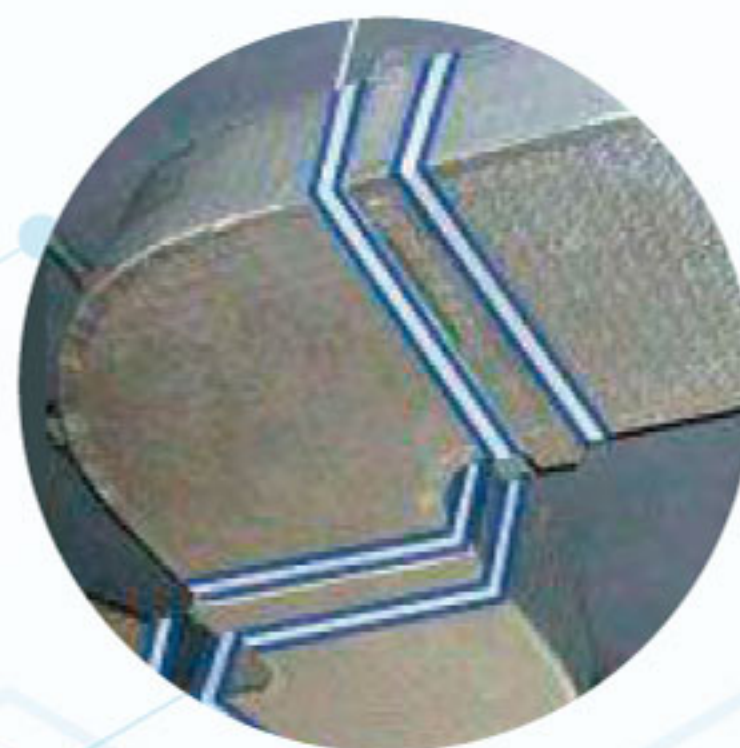

DUCTING
(METAL/METAL)



TAIL LIGHT



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

