



Formulated For The Professionals  
Adhesives & Sealants

ALUMINIUM & GLASS

# VT-210 / VT-210S High Performance Sealant

## 100% Neutral Silicone Sealant

A one-component, high performance, 100% neutral cure silicone sealant formulated to give excellent adhesion and durability. It has excellent resistance against outdoor weathering, vibration, temperature extremes, etc.

### Applications:

Well-suited for a strong weatherproof seal on most common building materials such as glass, aluminium, galvanized and zinc-coated steel, painted surfaces, brick, concrete and mirror bonding. Ideal for sealing metal lap joints in roofing, guttering and cladding applications.

### Applicable Test / Standard:


1. ASTM C920 & ASTM C719, Type S, Grade NS, Class 50, Use NT, M, A & G
2. ISO 11600, F Class 25 LM
3. Leadership in Energy and Environmental Design (LEED) v4.1 EQ compliant
  - Low VOC Content - USEPA Method 24 under SCAQMD Rule 1168
  - Low VOC Emission - CDPH Standard Method v1.2- 2017
4. FDA 21 CFR Part 175.300 (Food Contact Safe)
5. AS/NZS 4020:2005 (Grey only)
6. Sirim Test - ASTM D412: 2016 & MS1583-Part 1-2003
7. RoHS I, RoHS II, RoHS III & SVHC

**Available colours:** Translucent, White, Black, Grey, Aluminum, Dark Grey, and Dark Bronze.



### Features

- Certified Green Building Standard
- ±50 % Movement capability
- Excellent weathering resistance
- Permanently flexible
- Indoor and outdoor use

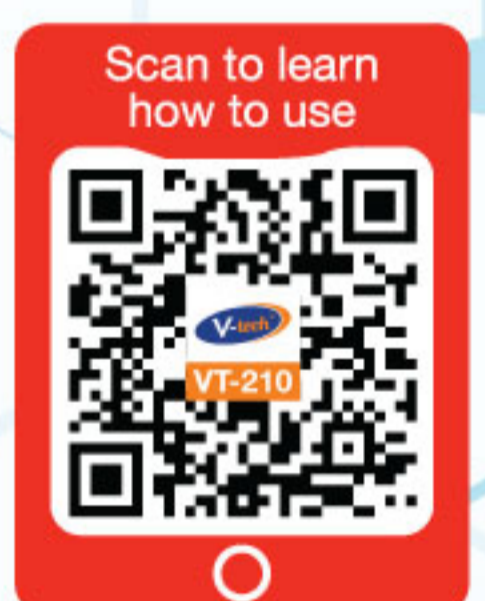

Item Code	Content	Carton Quantity
VT-210	300 ml Cartridge	24 / Carton
VT-210S	600 g Sausage	20 / Carton
VT-21020K	20 kg pail	-



REFRIGERATED BAKERY DISPLAY



RESERVOIR WATER TANK



METAL ROOF & GUTTER



MIRROR BONDING



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

